

# A65 - A80



IP 65

## Visually Comfortable Indirect Reflection

- Glare-free & High efficient light
- Optimal uniformity

### Application

Large store, Factory, Exhibition, Airport, Gym


### Specification

\* Tolerance : ± 5%

Model	Power	* Luminous Efficacy	* Luminous Flux	Color Temperature	CRI	Weight	Life Time	Input Voltage	Operation Temperature
<b>A65</b>	65W	105 lm/W	6,825 lm	4000K, 5000K	80 Ra	4.3 Kg / 9.47 lb	50,000hrs	AC100~277V	-20°C~50°C -4°F ~ 122°F
<b>A80</b>	80W		8,400 lm	5700K		4.8 Kg / 10.5 lb			

<b>Body</b>	Extruded Aluminum	<b>Mounting Option</b>	Surface Mount
<b>Cover</b>	Polycarbonate (Clear)	<b>Light Distribution</b>	90° (Asymmetric) / 130° (Asymmetric)
<b>Finish</b>	Anodized	<b>Control System</b>	Occupancy Sensor / Wired (DALI)

### Dimension

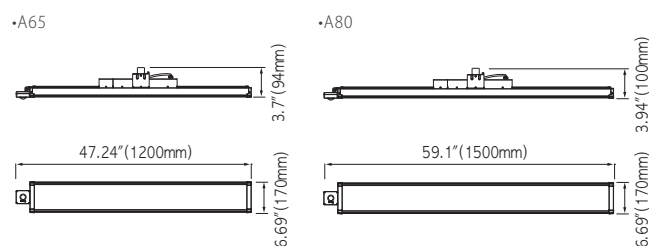

### Photometry

